



INDUSTRIAL VACUUM SYSTEMS

Product group
Mobile Vacuum Units

BlowVac Conic Diesel



BlowVac Conic Diesel

Conical collection container. Discharges the extracted material by tipping or by blowing, e.g. into a silo.



wieland lufttechnik

Wetterkreuz 12
91058 Erlangen
Germany

Phone +49 9131 60 67-0

Fax +49 9131 60 44 01

info@wieland-luft.com

www.wieland-luft.com



BlowVac Conic Diesel

With explosion protection system


- EVN pressure relief valve
- Disengagement valve, shuts off the pipework system in case of an explosion



Blowing device for blowing discharge of the extracted material into silos, bunkers or onto roofs (roof gravel). Fluidizing system for sticky suction material.



Hydraulic tipping discharge. Tipping angle 46°

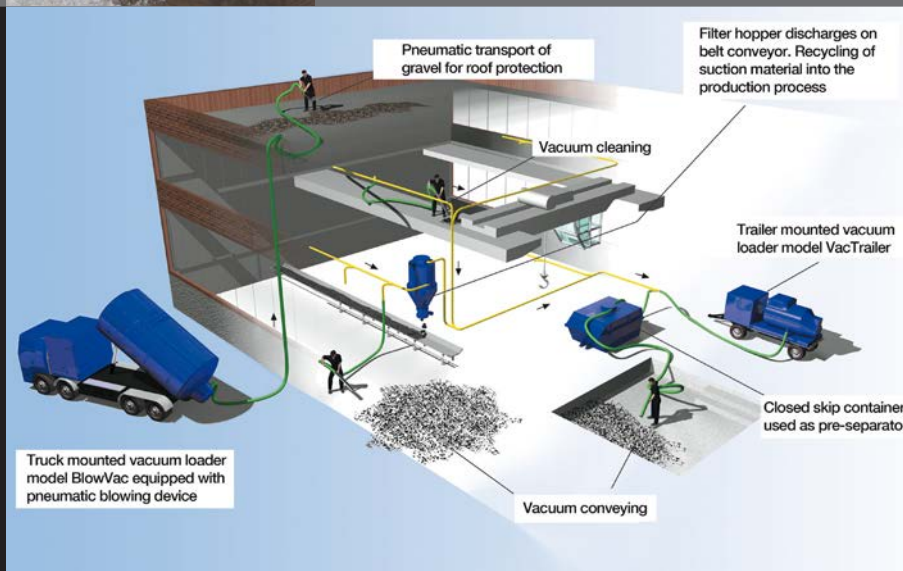

Technical details

Airflow*	m ³ /h	2100	3700
Suction power*	mbar	500	500
Suction inlet	DN	125	150
Pump drive Diesel engine	kW	44	96
Collection volume, approx.	m ³	6.4	6.4
Main filter	m ²	12	18
Safety filter	m ²	20	20
Noise level, 7 m distance**	dB(A)	78	80
Weight, standard equipment, approx.	kg	5000	5300

* max. vacuum pump, ** w/o reflexions

0214-042/1