


760



POTENZA MOTORE

MOTOR POWER

230/400 VOLT. 3 FASI-PHASE
1,5 KW. (1500W) 50/60 HZ



LUNGHEZZA SMUSSO (L)

BEVEL LENGTH (L)


max 22 mm
max 0.86in



ANGOLO DI SMUSSO

BEVEL ANGLE

15° - 60° (*) 0° - 60°



TUBO

PIPE

Ø150 - 300 mm
Ø 5.9 - 11.8in
OPTIONAL over 300 mm - 11.8in



FRESA

CUTTER

n° 2 Ø 60 mm - Z9 + Z9
n° 2 Ø 2.36in - Z9 + Z9
n° 3 Ø 60 mm - Z5 + Z5 + Z5
n° 3 Ø 2.36in - Z5 + Z5 + Z5



VELOCITÀ DI FRESA

CUTTER SPEED

2900 RPM



DIMENSIONI E PESO

DIMENSIONS AND WEIGHT

310x306x h 450 mm - KG. 19
12.2 x 12. x h17.7in - 41.8lbs




INTESTATURA

FACING

max 20 mm
max 0.79in
OPTIONAL



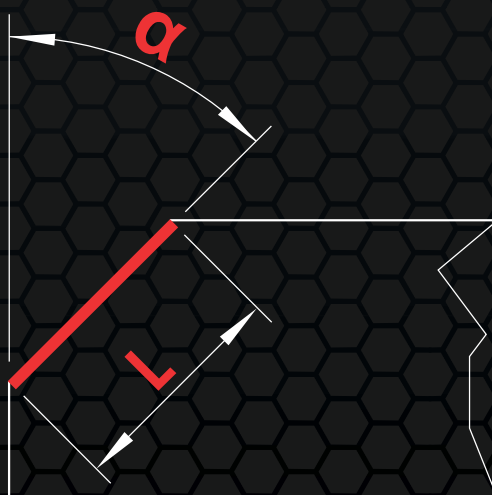

MASSIMO SMUSSO OTTENIBILE
MAX ACHIEVABLE BEVEL

ANGOLO / ANGLE		α15°	α30°	α45°	α60°
Lunghezza smusso	L	22	21	21	21
Bevel length					